
145t SPREADER BAR END CAP



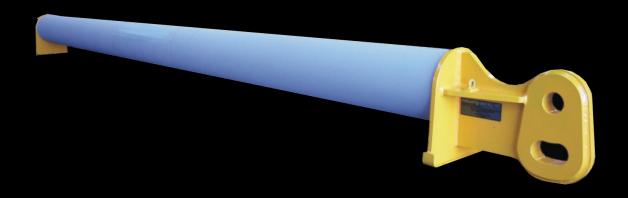


The Maxilug 145 allows users to create their own custom length, medium-lift spreader bar utilizing these heavy duty end units. Designed to accomodate readily available line pipe, Maxirig can supply the units as is or with various pipe lengths to facilitate lift spans from 2 metres up to 13 metres.

MAXILUG145

Capacity:	145 tonne at 60° / 80 tonne at 90°
Tare Weight:	210Kg each / 420Kg per pair (excludes pipe or rigging)
Lifting Lugs (top) suit:	85 tonne Grade 'S' safety bow shackle
Load Lugs (lower) suit:	85 tonne Grade 'S' safety bow shackle
Intermediate Pipe:	355.6mm OD x 9.53mm Wall C350LO (81.1Kg / MTR)

PRODUCT ASSURANCE	
Parent Standard:	AS4991
Proof Load Testing	Yes
MPI Weld Inspection	Yes
Manufacturer's Guarantee	1 Year

DDODLICT ACCLIDANCE

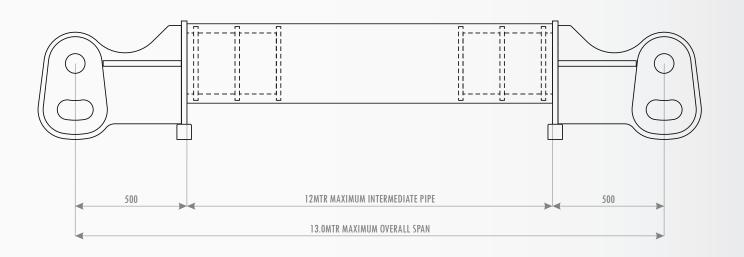



WE PROVIDE SUPERIOR QUALITY LIFTING PRODUCTS AUSTRALIA WIDE

All Maxirig products are designed and manufactured in Australia by our highly skilled team of engineers and boilermakers.



PH: (08) 9437 2312 sales@liftinggearhire.com.au www.liftinggearhire.com.au