50t SPREADER BAR END CAP






The Maxilug 50 allows users to create their own custom length, medium-lift spreader bar utilizing these heavy duty end units. Designed to accomodate readily available line pipe, Maxirig can supply the units as is or with various pipe lengths to facilitate lift spans from 2 metres up to 12 metres.

MAXILUG50

| Capacity: | 50 tonne at 60° / 30 tonne at 90° |
|--------------------------|--|
| Tare Weight: | 110Kg each / 220Kg per pair (excludes pipe or rigging) |
| Lifting Lugs (top) suit: | 35 tonne Grade 'S' safety bow shackle |
| Load Lugs (lower) suit: | 35 tonne Grade 'S' safety bow shackle |
| Intermediate Pipe: | 273.1mm OD x 12.7mm Wall C350LO (81.6Kg / MTR) |

| PRODUCT ASSURANCE | | |
|---------------------------|--------|--|
| Parent Standard: | AS4991 | |
| Proof Load Testing | Yes | |
| MPI Weld Inspection | Yes | |
| Manufacturer's Guarantee | 1 Year | |

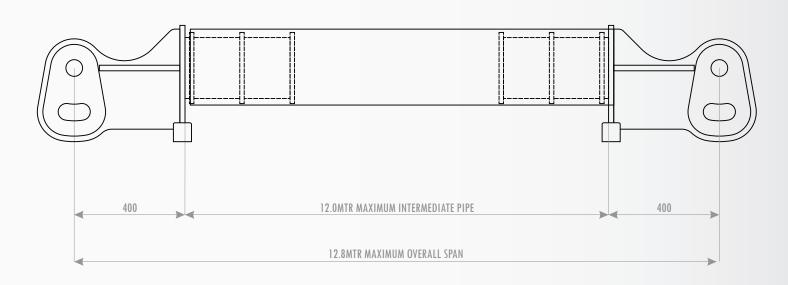



WE PROVIDE SUPERIOR QUALITY LIFTING PRODUCTS AUSTRALIA WIDE

All Maxirig products are designed and manufactured in Australia by our highly skilled team of engineers and boilermakers.



PH: (08) 9437 2312 sales@liftinggearhire.com.au www.liftinggearhire.com.au